


BL 10

Datasheet

Rev. 10 • Update 01/2020

AS AUTOMATIC
SYSTEMS

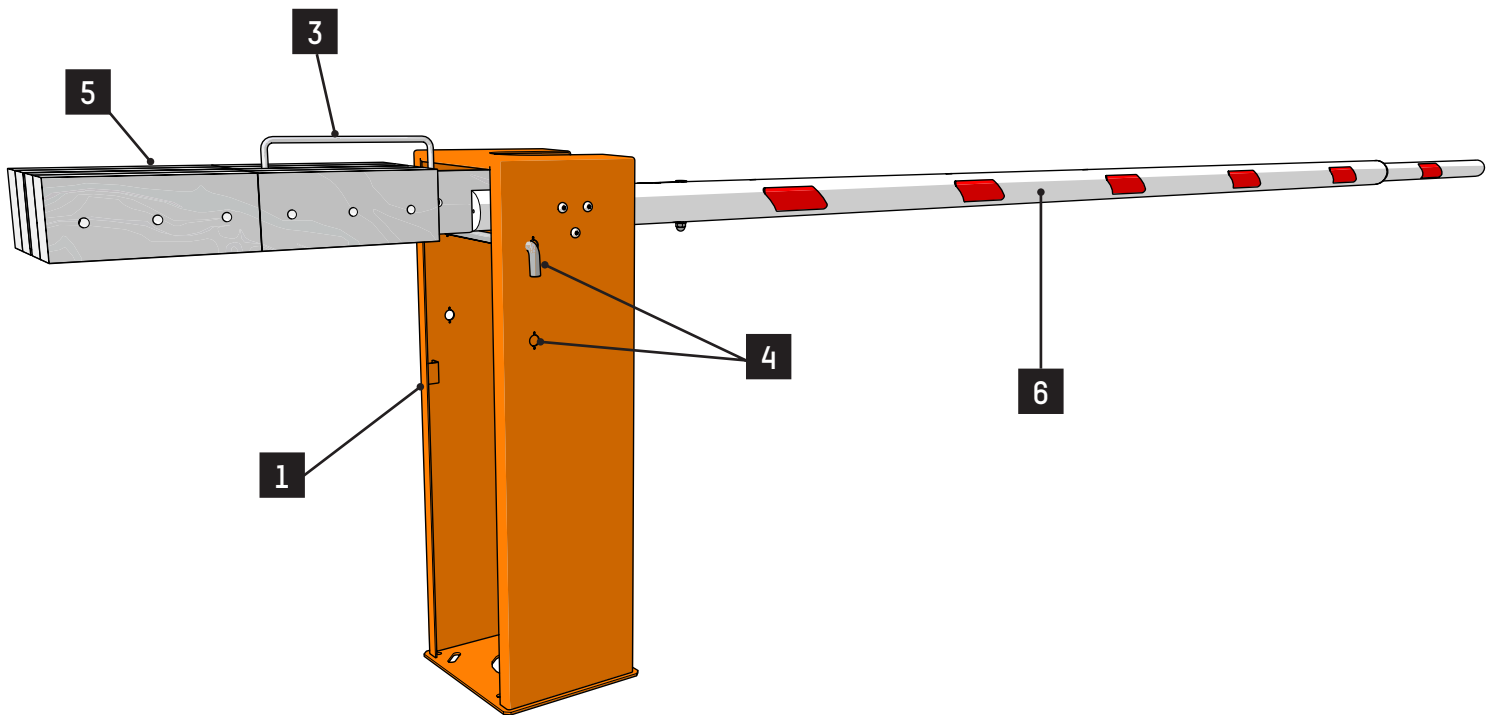

The manual raising barrier **BL 10** is intended for low-use access control.

STANDARD RAL COLORS



RAL 2000 (*)
Orange



RAL 3020
Traffic red



RAL 7016
Anthracite grey



RAL 9010
Traffic white

(*) Standard color. All other colors must be specified when ordering.

DESCRIPTION OF THE STANDARD EQUIPMENT

1. Electrogalvanised 3mm-thick sheet steel frame folded and welded on to a 10mm-thick base.
2. Stainless steel nuts and bolts.
3. Barrier shaft supported by 2 permanently lubricated self-aligning plummer blocks. Progressive stops enable the barrier to be stopped in a horizontal or vertical position.
4. Locking of the barrier in a vertical or horizontal position by padlockable pin.
5. Steel counterweights fixed on the operative shaft in order to ensure that the barrier's movements are balanced according to its range, at both opening and closing.
6. Round boom made of extruded aluminium alloy, 1 or 2 sections bushed according to the overall length:
 - From 3 to 5 m: 1 section with 80mm diameter.
 - From 5 to 8 m: 2 sections with 60mm and 80mm diameter.Boom enamelled white, with red reflective bands on both sides.
7. Fixing frame *(No provided)*.



www.automatic-systems.com

