


# BL 41

## Technical datasheet

Rev. 19 • Update 04/2025

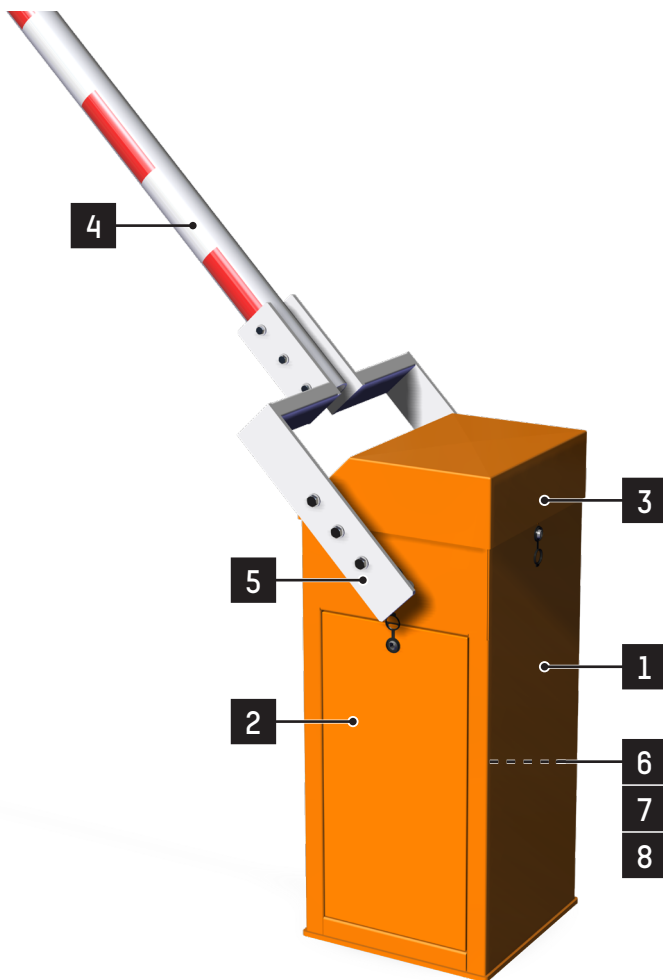

Rapid industrial lifting gate for access control over vehicles at very wide access points: industrial sites, traffic management, ...

### STANDARD RAL COLOURS



**RAL 2000 (\*)**  
Orange



**RAL 3020**  
Red



**RAL 7016**  
Anthracite grey



**RAL 9010**  
White

(\*) Standard color.

All other colors must be specified when ordering.


**Note:** These RAL references are available for free.

### DESCRIPTION

1. Sheet metal body folded and welded, from 3 to 8 mm thick.
2. Lateral and frontal doors with peripheral sealing joint and lock, ensuring easy access to the mechanism. Two configurations are possible for their installation (see illustration).
3. Removable top cover, with lock and key.
4. Round central aluminium arm, lacquered white with red reflective strips, made up of 2 or 3 segments fitting into each other of a diameter of 100 - 90 - 84 mm if longer than 6 m, and guyed with galvanised steel cables if longer than 7 meters.
5. Solid driving shaft for the arm, diameter 50 mm, mounted on 2 bearings lubricated for life.
6. Electromechanical assembly:
  - Reversible three-phase asynchronous gear motor, ensuring protection of the mechanism in the event of forced lifting of the arm due to fraudulent action
  - Secondary transmission on gearwheel and sprocket wheel. Maintaining the arm in its two extreme positions (open and closed), as well as after a STOP command, is achieved by means of an electromagnetic brake
  - Frequency inverter ensuring progressive accelerations and cushioned decelerations, for movement without vibration, direction inversion without jolts (reopening) and increased protection of the mechanism
  - Electronic limitation of the electromechanical assembly torque allowing for the immediate stop of the arm during closing in the event of an obstacle
  - Analog sensor
  - Balancing of the arm by means of one or more compression springs, depending on the weight of the arm
  - Lever for manual lifting of the arm (except for the automatic opening option)
7. Parametrisable electronic control board allowing for various control options and/or additional accessories.
8. Connecting terminal block on the control board, in order to provide, for example, the status of the presence detectors.



## CONFIGURATIONS

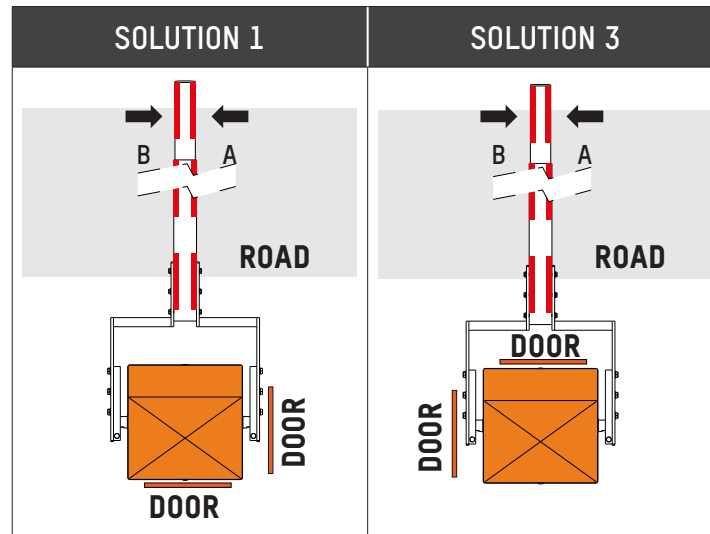

## STANDARD TECHNICAL CHARACTERISTICS

Power supply	Single-phase 230 VAC - 50/60 Hz + ground <sup>(1)</sup>
Consumption	450 W
Motor	Three-phased asynchronous 250W
Reversible ring and pinion speed reducer, service factor 1.2	
Useful arm length (L)	6 to 12 m, in increments of 0.5 m
Operation not hampered by 120 km/h winds	
Ambient operating temperature	Between -20 and +50°C (without optional heating)
Relative ambient humidity	95% without condensation
Minimum opening/closing time	Up to 4.2 sec., depending on the configuration and the application.
Net weight	230 kg (without arm)
Weight of the arm	20 to 30 kg, depending on length and without options
MCBF (Mean Cycle Between Failure)	<b>5,000,000</b> cycles, in compliance with recommended maintenance
Sound level	<70 db(A) <sup>(2)</sup>
IP rating	IP44
CE	Complies with European standards.

(1) Do not connect to an isolated ground network or a high impedance earthed industrial network.

(2) Measured at 1 m from the machine surface and at a height of 1.60 m above the floor according to ISO3744. No hearing protection equipment required.

## SURFACE TREATMENTS

- Zinc-coated internal mechanical parts.
- Door and cover: stainless steel + structured paint.
- Frame : primer + structured paint.

## WORKS TO BE PROVIDED BY THE CUSTOMER

- Adapted ground fastening
- Power supply
- Wiring towards eventual external peripherals

**Note:** Follow the installation plan (CH6943).

## OPTIONS

### ARMS

- Folding rigid aluminium skirt.
- Offset stirrup (Left or right).
- Double arm stretcher - Above and below the arm.
- Automatic opening of the arm in case of power failure.
- Arm locking system: open and/or closed position.<sup>[3]</sup>
- Limit switch for info (Arm position in case of power failure).

### TIP SUPPORT

- Height adjustable tip support.
- Electromagnetic tip support - Ø 100 mm or oval arm.
- Vandal-proof tip support.
- Anti-vandalism tip support with electromagnetic suction device.
- Folding tip support.
- Electro-locked tip support.
- Support leg for fence and aluminium skirt if no tip support.

### SECURITY & SAFETY

- Rotating base with reporting of information on the housing position.
- Vandal-proof package (locking of doors and cover with belts and padlocks).
- Opening protection of both cover & door - Information by a dry contact.

### CONTROL & COMMAND

- Push button box - 2 buttons (opening / closing).
- Push button box - 3 buttons (opening / closing / stop).
- Push button box - 2 push buttons + 1 switch (3 positions).<sup>[4]</sup>
- Fireman emergency opening embedded in the housing (11mm spanner wrench).
- Programmable clock (Weekly or Yearly).
- Key switch on the housing.<sup>[5]</sup>
- Radio transmitter/receiver - 2 or 4 channels.
- Inductive loop for vehicle detection.
- Presence sensor for inductive loop.
- Photo-electric cell (Transmitter / Receiver or Reflex).
- Support post for photo-electric cell (H = 0,7 m).
- Cell mounting - Transmitter + Receiver or Reflex.
- Ultrasonic detector installed in the housing under the arm (protection cover included).<sup>[6]</sup>
- Ultrasonic detector on the housing under the arm (protective cover included).<sup>[6]</sup>
- Human Machine Interface colour screen with keypad for AS1620 logic board (AS1621).
- Ethernet interface (AS1622).
- SD memory card for AS1620 Ethernet board.
- Input / output (I/O) extension card for AS1620 logic board (AS1623).
- Totalling counter (number of vehicle operations or with resetting).
- Counter / Count down (parking : in - out = total).
- Laser sensor - On separate post
- Laser sensor - fixed on barrier housing
- Remote control for laser sensor
- Reference point for laser sensor fixed on post
- Reference point for laser sensor fixed on tip support
- Double laser sensor - fixed on barrier housing

### SIGNALISATION

- LEDs on arm - Per pair (Flashing lights (red) when closed).
- Traffic lights (Ø 100 mm) - Red/green LEDs - Supply.
- Traffic lights (Ø 200 mm) - Red/green LEDs - Fixed on a support post on the barrier.
- Traffic lights (Ø 200 mm) - Orange LEDs - Fixed on a support post on the barrier.
- Traffic lights (Ø 200 mm) - Red/green LEDs - Supply.
- Traffic lights (Ø 200 mm) - Orange LEDs - Supply.
- Support post (H = 2,7 m) for traffic lights - Supply.
- Extension board (electronic board for third-party traffic lights).
- Acoustic alarm 100dB (internal mounting) during the barrier closing movement.
- LED boom lighting for arm up to 6m.<sup>[7]</sup>
- Aluminium composite traffic sign (Ø 300 mm).
- LED flashing light on the cover.<sup>[8]</sup>
- LED flashing light with grid on the top cover.<sup>[8]</sup>
- Vandal-proof LED module on the cover.

### AESTHETIC

- Non standard colour.
- Treatment for aggressive saline environment.<sup>[9]</sup>
- Steel raised base (RAL 9005 painted).

### POWER SUPPLY

- Power supply 120 V - 50/60 Hz.

### ENVIRONMENT

- Thermostatic heating - Heating for operation until -25°C.
- Thermostatic heating - Heating for operation until -45°C

### CASES

- Painted IP66 steel case (dimensions 600 x 380 x 120 mm) on the housing (with a lock & a key settled with a cable retainer).
- Plastic case IP66 (dimensions 290 x 340 x 128 mm) in the housing.
- Painted IP66 stainless steel case (dimensions 600 x 380 x 120 mm) on the housing (with a lock & a key settled with a cable retainer).

**Note:** For restrictions on options, please contact us.

(3) The reaction in case of power cut (locked or not) must be specified when ordering.

(4) Opening/Closing + switch for Automatic or Manual mode.

(5) Automatic / Locked open / Locked closed.



(6) Not considered as a safety device if used alone.

(7) Incompatible with swing-off oval arm.

(8) Flashing during opening/closing movement and in open position - Off in closed position.

(9) Recommended for an installation within 10 km of the coast: sandblasting + Alu Zinc plating 80µm outside (40µm inside) + polyzinc 80µm + 80µm powder coat.

## STANDARD DIMENSIONS (MM)

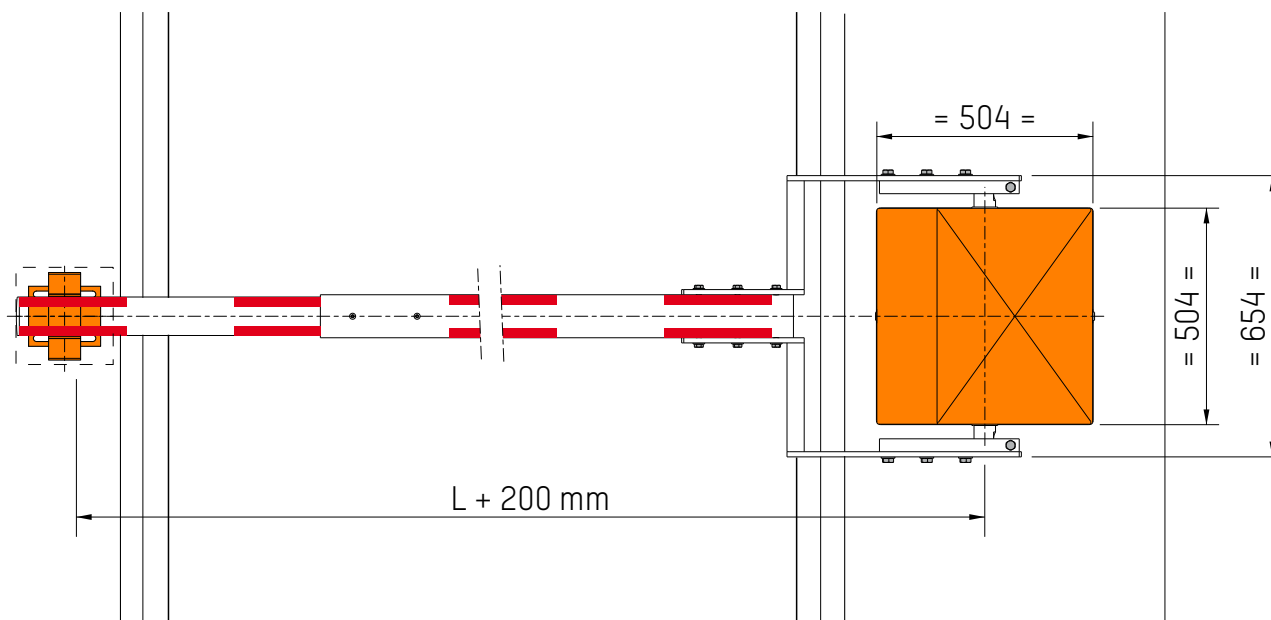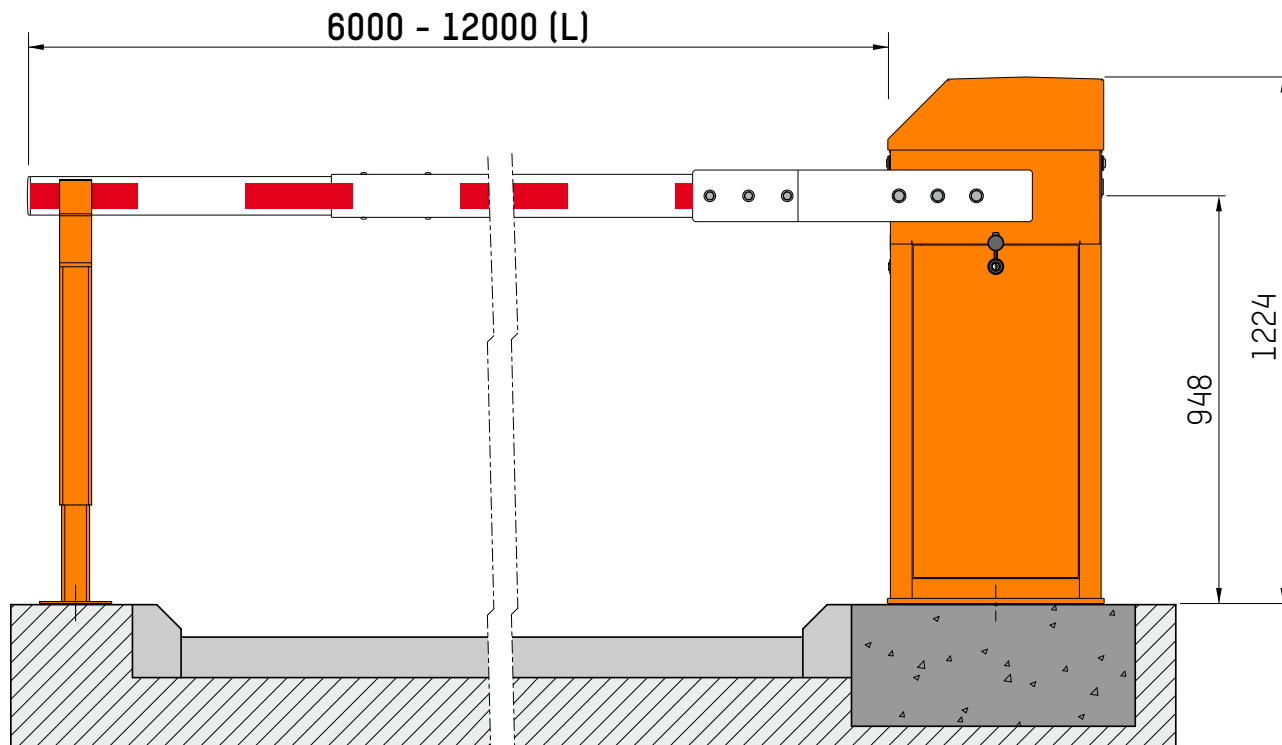

Please note! For a BL 41 equipped with a rigid folding skirt (optional), the total length of the arm = useful arm length (L) + 35 mm.

### Headquarters

Avenue Mercator, 5  
1300 Wavre - Belgium

sales.asgroup@automatic-systems.com

+32.(0)10.23.02.11

www.automatic-systems.com

