


BL 47

Technical datasheet

Rev. 11 • Update 04/2025

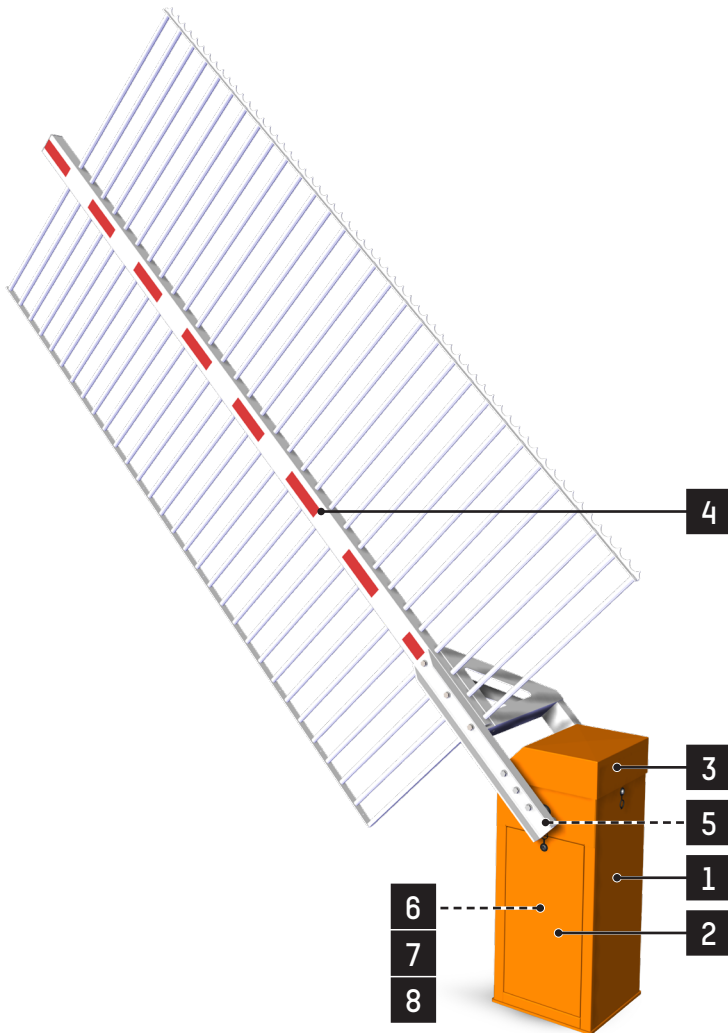

Industrial rising gate secured with rigid fence to control access of vehicles at medium access points for industrial sites, traffic management, etc.

STANDARD RAL COLORS



RAL 2000 (*)
Orange



RAL 3020
Red



RAL 7016
Anthracite grey



RAL 9010
White

(*) Standard color.

All other colors must be specified when ordering.

Note: These RAL references are available for free.

DESCRIPTION

1. Sheet metal body folded and welded, from 3 to 8 mm thick.
2. Lateral and frontal doors with peripheral sealing joint and lock, ensuring easy access to the mechanism.
3. Removable top cover, with lock and key.
4. Offset rectangular (120 x 80 mm section) aluminium arm, lacquered white with red reflective strips.


The arm is provided in standard with a rigid fence in aluminium with anti-climbing profile (cockscomb) and rubber protective profiles.

The rigid fence is composed of aluminium tubes with $\varnothing 25$ mm profile welded on both sides of the arm.

5. Solid arm driving shaft, diameter 50 mm, mounted on 2 lifetime lubricated bearings. The axle exit, centred on the housing, provides for the easy reversal of the barrier model (arm to the left or to the right side of the housing), which provides 4 configurations, taking also into account the position of the doors (see illustration).
6. Electromechanical assembly:
 - Reversible three-phase asynchronous gear motor, ensuring protection of the mechanism in the event of forced lifting of the arm due to fraudulent action.
 - Secondary transmission on gearwheel and sprocket wheel. Maintaining the arm in its two extreme positions (open and closed), as well as after a STOP command, is achieved by means of an electromagnetic brake.
 - Frequency inverter ensuring progressive accelerations and cushioned decelerations, for movement without vibration, direction inversion without jolts (reopening) and increased protection of the mechanism.
 - Electronic limitation of the electromechanic assembly torque allowing for the immediate stop of the arm during closing in the event of an obstacle.
 - Analog sensor.
 - Balancing of the arm by means of one or more compression springs, depending on the weight of the arm.
 - Lever for manual lifting of the arm (except for the automatic opening option).
7. Parameterisable electronic control board allowing for various control options and/or additional accessories.
8. Connecting terminal block on the control board, in order to provide, for example, the status of the presence detectors.



CONFIGURATIONS

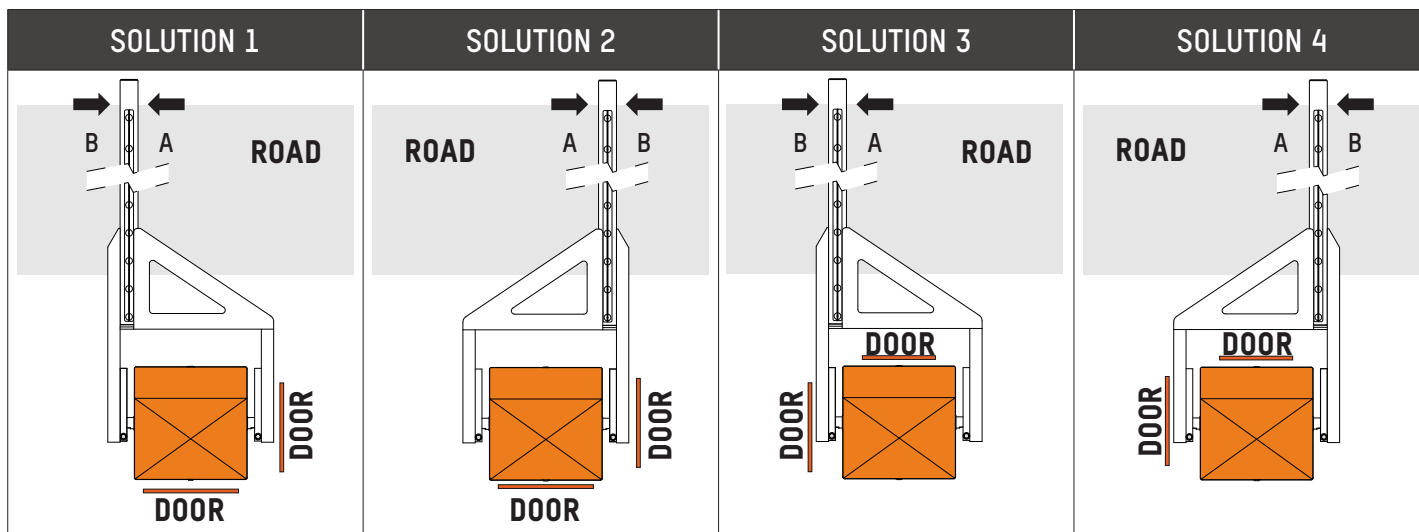

STANDARD TECHNICAL CHARACTERISTICS

Power supply	Single-phase 230 VAC - 50/60 Hz + ground ⁽¹⁾
Consumption	450 W
Motor	Three-phased asynchronous 250W
Reversible ring and pinion speed reducer, service factor 1.2	
Useful arm length (L)	4 or 5 m, resulting in free passage (PL) of 3.35 or 4.35 m respectively.
Operation not hampered by 120 km/h winds	
Ambient operating temperature	Between -20 and +50°C (without optional heating)
Relative ambient humidity	95% without condensation
Minimum opening/closing time	Up to 6,3 sec., depending on the configuration and the application.
Net weight	300 kg (without arm)
Weight of the arm	65 to 80 kg, depending on length and without options
MCBF (Mean Cycle Between Failure)	5,000,000 cycles, in compliance with recommended maintenance
Sound level	<70 db(A) ⁽²⁾
IP rating	IP44
CE	Complies with European standards.

(1) Do not connect to an isolated ground network or a high impedance earthed industrial network.

(2) Measured at 1 m from the machine surface and at a height of 1.60 m above the floor according to ISO3744. No hearing protection equipment required.

SURFACE TREATMENT

- Zinc-coated internal mechanical parts.
- Door and cover: stainless steel + structured paint.
- Frame : primer + structured paint.

WORKS TO BE PROVIDED BY THE CUSTOMER

- Ground installation.
- Power supply.
- Wiring to any external devices.

Note: Follow the installation plan (CH6943).

OPTIONS

ARMS

- Extension of the rigid fence at the end of arm - Upper part.
- Extension of the rigid fence at the end of arm - Lower part.
- Automatic opening of the arm in case of power failure.
- Arm locking system: open and/or closed position.⁽³⁾
- Limit switch for info (Arm position in case of power failure).

TIP SUPPORT

- Height adjustable tip support.
- Electromagnetic tip support - Ø 100 mm or oval arm.
- Vandal-proof tip support.
- Anti-vandalism tip support with electromagnetic suction device.
- Electro-locked tip support.
- Support leg for fence and aluminium skirt if no tip support.

SECURITY & SAFETY

- Opening protection of both cover & door - Information by a dry contact.

CONTROL & COMMAND

- Push button box - 2 buttons (opening / closing).
- Push button box - 3 buttons (opening / closing / stop).
- Push button box - 2 push buttons + 1 switch (3 positions).⁽⁴⁾
- Fireman emergency opening embedded in the housing (11mm spanner wrench).
- Programmable clock (Weekly or Yearly).
- Key switch on the housing.⁽⁵⁾
- Radio transmitter/receiver - 2 or 4 channels.
- Inductive loop for vehicle detection.
- Presence sensor for inductive loop.
- Photo-electric cell (Transmitter / Receiver or Reflex).
- Support post for photo-electric cell (H = 0,7 m).
- Cell mounting - Transmitter + Receiver or Reflex.
- Human Machine Interface colour screen with keypad for AS1620 logic board (AS1621).
- Ethernet interface (AS1622).
- SD memory card for AS1620 Ethernet board.
- Input / output (I/O) extension card for AS1620 logic board (AS1623).
- Totalling counter (number of vehicle operations or with resetting).
- Laser sensor - On separate post
- Laser sensor - fixed on barrier housing
- Remote control for laser sensor
- Reference point for laser sensor fixed on post
- Reference point for laser sensor fixed on tip support
- Double laser sensor - fixed on barrier housing

SIGNALISATION

- LEDs on arm - Per pair (Flashing lights (red) when closed).
- Traffic lights (Ø 100 mm) - Red/green LEDs - Supply.
- Traffic lights (Ø 200 mm) - Red/green LEDs - Fixed on a support post on the barrier.
- Traffic lights (Ø 200 mm) - Orange LEDs - Fixed on a support post on the barrier.
- Traffic lights (Ø 200 mm) - Red/green LEDs - Supply.
- Traffic lights (Ø 200 mm) - Orange LEDs - Supply.
- Support post (H = 2,7 m) for traffic lights - Supply.
- Acoustic alarm 100dB (internal mounting) during the barrier closing movement.
- Aluminium composite traffic sign (Ø 300 mm).
- LED flashing light on the cover.⁽⁶⁾
- LED flashing light with grid on the top cover.⁽⁶⁾
- Vandal-proof LED module on the cover.

AESTHETIC

- Non standard colour.
- Treatment for aggressive saline environment.⁽⁷⁾
- Steel raised base (RAL 9005 painted).

POWER SUPPLY

- Power supply 120 V - 50/60 Hz.

ENVIRONMENT

- Thermostatic heating - Heating for operation until -25°C.
- Thermostatic heating - Heating for operation until -45°C

CASES

- Painted IP66 steel case (dimensions 600 x 380 x 120 mm) on the housing (with a lock & a key settled with a cable retainer).
- Plastic case IP66 (dimensions 290 x 340 x 128 mm) int he housing.
- Painted IP66 stainless steel case (dimensions 600 x 380 x 120 mm) on the housing (with a lock & a key settled with a cable retainer).

Note: For restrictions on options, please contact us.

(3) The reaction in case of power cut (locked or not) must be specified when ordering.



(4) Opening/Closing + switch for Automatic or Manual mode.

(5) Automatic / Locked open / Locked closed.

(6) Flashing when opening/closing movement and when open - Off when closed.


(7) Recommended for an installation within 10 km of the coast: sandblasting + Alu Zinc plating 80µm outside (40µm inside) + polyzinc 80µm + 80µm powder coat.

STANDARD DIMENSIONS (MM)

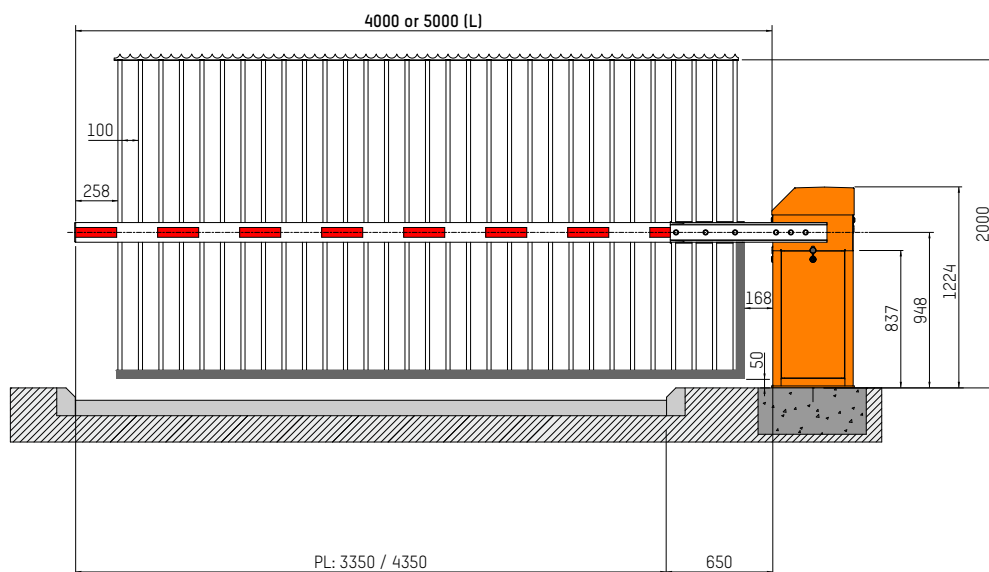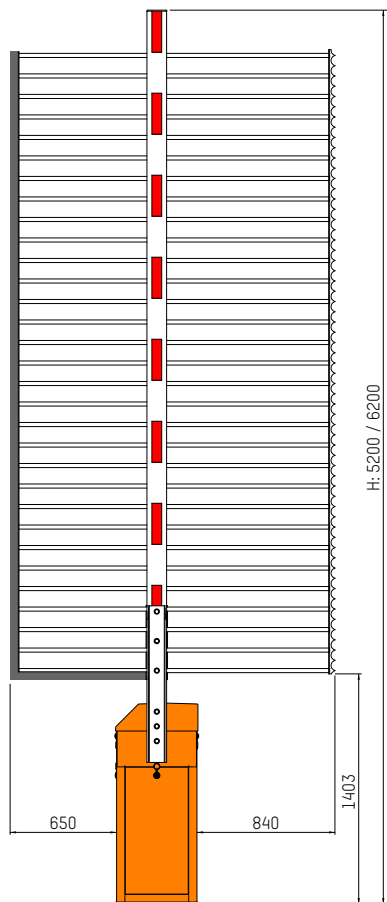

PL: 3350 / 4350

PL	3350	4350
L	4000	5000
H	5200	6200

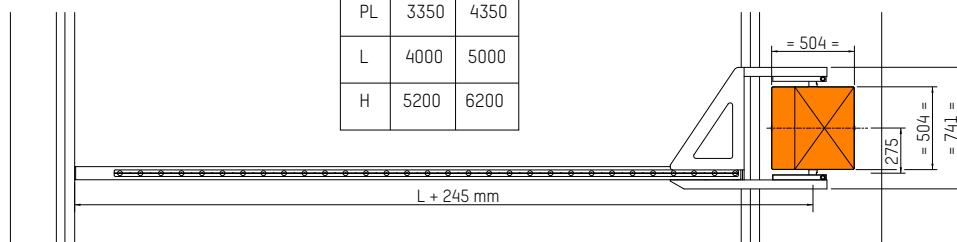

Headquarters

Avenue Mercator, 5
1300 Wavre - Belgium



sales.asgroup@automatic-systems.com



+32.(0)10.23.02.11



www.automatic-systems.com



BL47-FT-EN-11