



The Smart Touch product provides a simple and elegant remote management solution, via an Ethernet network, built around one or two arrays of access control devices.

It comes in the form of a 10" PC panel with touch screen that provides a clear representation of the installation in just a few views, and offers the following features:

- Addition or removal of equipment
- Choice of operating mode in both directions of passage.
- Granting of one or more passage authorisations for a specific item of equipment.
- Activation of evacuation mode for the entire site.
- Display of alarms and technical faults.
- Management of the maximum number of people allowed to enter and leave the building via a "counter".
- The connection of a loudspeaker to replicate the audible alarms of the pedestrian products.

The application can be accessed only with username and password. It has two access levels according to the type of user (administrator or operator).

DESCRIPTION

1. 10" colour touch screen equipped with the Android™ operating system and the Smart Touch application.
2. Modern design and inclined support for ease of use.

CONNECTION VIA ETHERNET NETWORK

In a typical installation, the Smart Touch is connected to a Switch via its RJ45 Ethernet Port, as are the devices to be controlled, each device having its own specific IP address.



TECHNICAL CHARACTERISTICS

| | |
|------------------------------|--|
| Power supply | 12V/DC via standard single-phase adapter, 100-240V/AC, 50-60Hz |
| Communication interface | Ethernet |
| Jack Socket | 3.5mm stereo headphone/micro output |
| Available software languages | French, English, German, Spanish, Dutch, Portuguese, Italian and Russian |
| Screen | 10-inch (resolution 1280x800) colour, touch screen |
| Types of equipment supported | Products equipped with AS1190, AS1620 and AS1635 logic are recognised by the Smart Touch |


EXTERNAL DIMENSIONS

| | |
|--------|--------|
| Width | 260 mm |
| Height | 193 mm |
| Depth | 146 mm |


WORKS TO BE PROVIDED BY THE CUSTOMER

- Power supply.
- Electrical connection wiring to the Ethernet network using one or more Switches.

EXAMPLES OF SCREEN

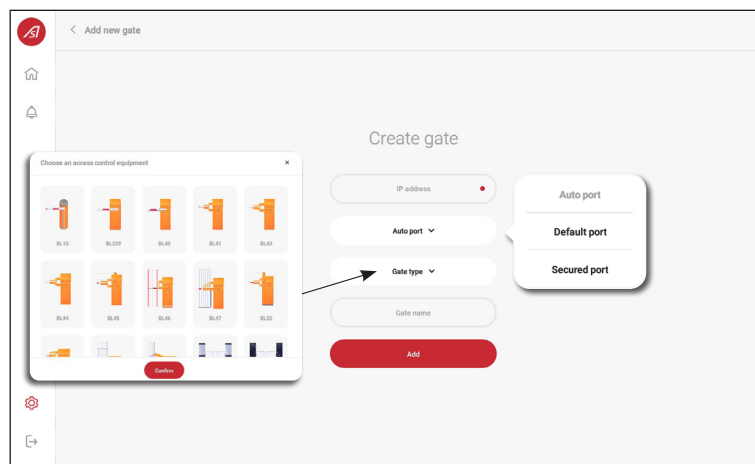

Creating a new device in an array

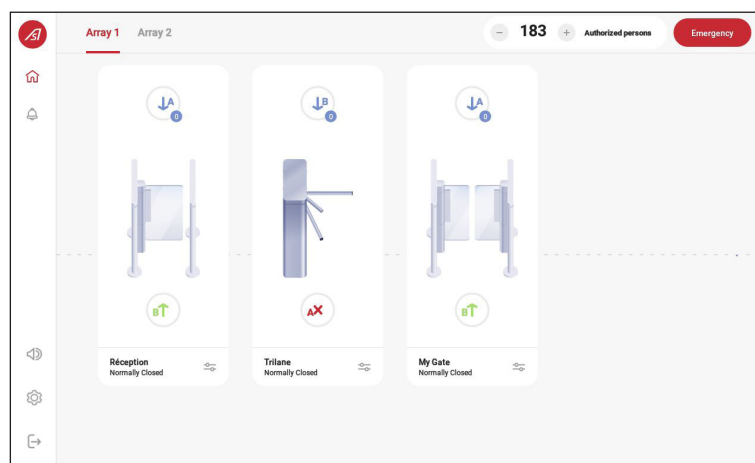

Counter on "Battery display" screen

